


Mechanical Engineering Department
University of New Mexico
Ph.D. Qualifying Examination
Controls Section
Spring 2018

INSTRUCTIONS:

- Closed Book
- There are 4 problems worth a total of 100 points
- 2 Hours
- Calculator allowed
- You ***MUST*** show work to get credit.

Problem 1 (25 points)

Given the system shown

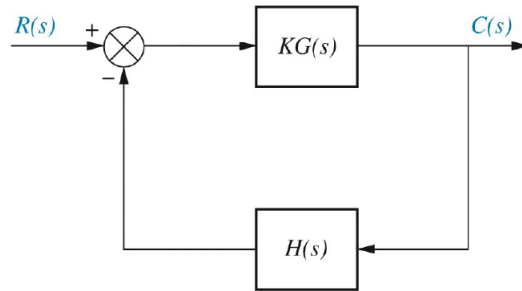


$$G(s) = \frac{1}{s(s+1)(s+2)}$$
$$H(s) = \frac{(s+3)}{3}$$

- a) Sketch the root locus for the system as K varies from 0 to $+1$. Show ALL important calculations: show clearly the asymptotes, if any are present. Find the breakaway and/or break-in points.
- (b) The point $s = -0.5$ is on the root locus. Find the gain K that corresponds to that pole location.

Problem 2 (25 points)

Given the unity feedback system with

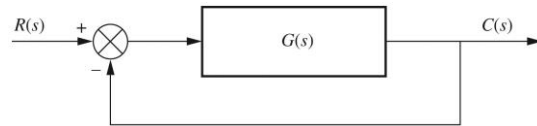


find the following:


- (a) The range of K that keeps the system stable;
- (b) the value of K that makes the system oscillate; and
- (c) the frequency of oscillation when K is set to the value found in (b).

Problem 3 (25 points)

Determine the values of K and k of the closed loop system in the figure so that the maximum overshoot in unit-step response is 25% and the peak time is 2 sec. Assume $J=1$ kg m².

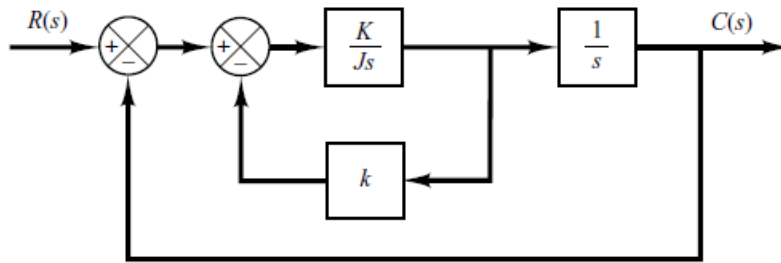

Problem 4 (25 points)

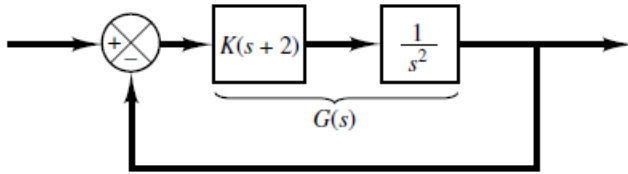

Consider the feedback control system in the figure. Determine the value of K such that the phase margin is 50° . What is the gain margin in this case?

Name	Time function, $f(t)$	Laplace transform, $F(s)$
Unit impulse	$\delta(t)$	1
Unit step	$u(t)$	$\frac{1}{s}$
Unit ramp	t	$\frac{1}{s^2}$
n th-order ramp	t^n	$\frac{n!}{s^{n+1}}$
Exponential	e^{-at}	$\frac{1}{s+a}$
n th-order exponential	$t^n e^{-at}$	$\frac{n!}{(s+a)^{n+1}}$
Sine	$\sin bt$	$\frac{b}{s^2 + b^2}$
Cosine	$\cos bt$	$\frac{s}{s^2 + b^2}$
Damped sine	$e^{-at} \sin bt$	$\frac{b}{(s+a)^2 + b^2}$
Damped cosine	$e^{-at} \cos bt$	$\frac{s+a}{(s+a)^2 + b^2}$
Diverging sine	$t \sin bt$	$\frac{2bs}{(s^2 + b^2)^2}$
Diverging cosine	$t \cos bt$	$\frac{s^2 - b^2}{(s^2 + b^2)^2}$

12

TABLE 2.2 Laplace transform theorems

Item no.	Theorem	Name
1.	$\mathcal{L}[f(t)] = F(s) = \int_0^\infty f(t)e^{-st} dt$	Definition
2.	$\mathcal{L}[kf(t)] = kF(s)$	Linearity theorem
3.	$\mathcal{L}[f_1(t) + f_2(t)] = F_1(s) + F_2(s)$	Linearity theorem
4.	$\mathcal{L}[e^{-at}f(t)] = F(s+a)$	Frequency shift theorem
5.	$\mathcal{L}[f(t-T)] = e^{-sT}F(s)$	Time shift theorem
6.	$\mathcal{L}[f(at)] = \frac{1}{a}F\left(\frac{s}{a}\right)$	Scaling theorem
7.	$\mathcal{L}\left[\frac{df}{dt}\right] = sF(s) - f(0^-)$	Differentiation theorem
8.	$\mathcal{L}\left[\frac{d^2f}{dt^2}\right] = s^2F(s) - sf(0^-) - f'(0^-)$	Differentiation theorem
9.	$\mathcal{L}\left[\frac{d^nf}{dt^n}\right] = s^nF(s) - \sum_{k=1}^n s^{n-k}f^{k-1}(0^-)$	Differentiation theorem
10.	$\mathcal{L}\left[\int_0^t f(\tau)d\tau\right] = \frac{F(s)}{s}$	Integration theorem
11.	$f(\infty) = \lim_{s \rightarrow 0} sF(s)$	Final value theorem ¹
12.	$f(0^+) = \lim_{s \rightarrow \infty} sF(s)$	Initial value theorem ²

¹For this theorem to yield correct finite results, all roots of the denominator of $F(s)$ must have negative real parts, and no more than one can be at the origin.

²For this theorem to be valid, $f(t)$ must be continuous or have a step discontinuity at $t = 0$ (that is, no impulses or their derivatives at $t = 0$).

