

# Mechanical Engineering Department University of New Mexico

## Ph.D. Qualifying Examination

### Controls Section


Fall  
2017

#### INSTRUCTIONS:

- Closed Book
- There are 4 problems worth a total of 100 points
- 2 Hours
- Calculator allowed
- You **MUST** show work to get credit.

**Problem 1. (25 points)**

Determine the values of  $K$  and  $k$  for the closed loop system shown in the figure so that when the input is the unit step function, the maximum overshoot is 25% and the peak time is 2 sec. Assume that  $J=1 \text{ kg m}^2$ .

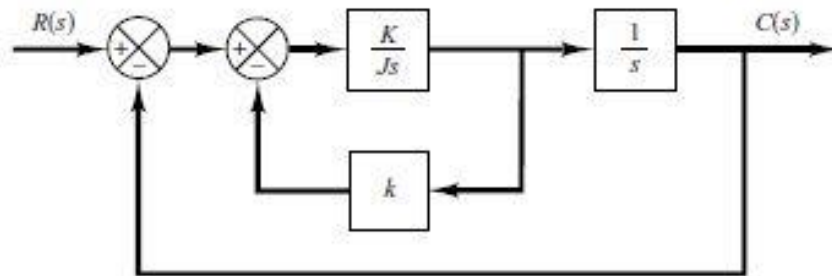



**Problem 2. (25 points)**

Sketch the root locus for the system with transfer function:


$$G(s) = \frac{6(s+1)}{s^2(s+2)(s+3)}$$

Explain which rules you applied.



**Problem 3 (25 points)**


For the given unity feedback system find the range of  $K$  that keeps the system stable.

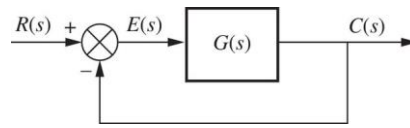

$$G(s) = \frac{K(s+4)}{s(s+1.2)(s+2)}$$

**Problem 4 (25 points)**

The following unity feedback system is to follow a ramp input,  $r(t) = tu(t)$ , so that the steady-state error is 0.01. The natural frequency of the closed-loop system will be  $\omega_n = 5$  rad/s. What is the system type? Determine the values of  $K$  and  $\alpha$ .

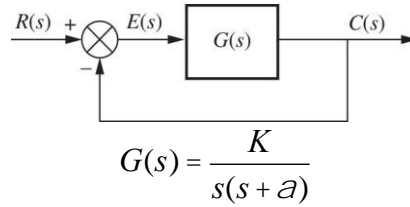

Name	Time function, $f(t)$	Laplace transform, $F(s)$
Unit impulse	$\delta(t)$	1
Unit step	$u(t)$	$\frac{1}{s}$
Unit ramp	$t$	$\frac{1}{s^2}$
$n$ th-order ramp	$t^n$	$\frac{n!}{s^{n+1}}$
Exponential	$e^{-at}$	$\frac{1}{s+a}$
$n$ th-order exponential	$t^n e^{-at}$	$\frac{n!}{(s+a)^{n+1}}$
Sine	$\sin bt$	$\frac{b}{s^2+b^2}$
Cosine	$\cos bt$	$\frac{s}{s^2+b^2}$
Damped sine	$e^{-at} \sin bt$	$\frac{b}{(s+a)^2+b^2}$
Damped cosine	$e^{-at} \cos bt$	$\frac{s+a}{(s+a)^2+b^2}$
Diverging sine	$t \sin bt$	$\frac{2bs}{(s^2+b^2)^2}$
Diverging cosine	$t \cos bt$	$\frac{s^2-b^2}{(s^2+b^2)^2}$

12

**TABLE 2.2** Laplace transform theorems

Item no.	Theorem	Name
1.	$\mathcal{L}[f(t)] = F(s) = \int_0^\infty f(t)e^{-st} dt$	Definition
2.	$\mathcal{L}[kf(t)] = kF(s)$	Linearity theorem
3.	$\mathcal{L}[f_1(t) + f_2(t)] = F_1(s) + F_2(s)$	Linearity theorem
4.	$\mathcal{L}[e^{-at}f(t)] = F(s+a)$	Frequency shift theorem
5.	$\mathcal{L}[f(t-T)] = e^{-sT}F(s)$	Time shift theorem
6.	$\mathcal{L}[f(at)] = \frac{1}{a}F\left(\frac{s}{a}\right)$	Scaling theorem
7.	$\mathcal{L}\left[\frac{df}{dt}\right] = sF(s) - f(0^-)$	Differentiation theorem
8.	$\mathcal{L}\left[\frac{d^2f}{dt^2}\right] = s^2F(s) - sf(0^-) - f'(0^-)$	Differentiation theorem
9.	$\mathcal{L}\left[\frac{d^n f}{dt^n}\right] = s^n F(s) - \sum_{k=1}^n s^{n-k} f^{(k-1)}(0^-)$	Differentiation theorem
10.	$\mathcal{L}\left[\int_0^t f(\tau)d\tau\right] = \frac{F(s)}{s}$	Integration theorem
11.	$f(\infty) = \lim_{s \rightarrow 0} sF(s)$	Final value theorem <sup>1</sup>
12.	$f(0^+) = \lim_{s \rightarrow \infty} sF(s)$	Initial value theorem <sup>2</sup>

<sup>1</sup>For this theorem to yield correct finite results, all roots of the denominator of  $F(s)$  must have negative real parts, and no more than one can be at the origin.

<sup>2</sup>For this theorem to be valid,  $f(t)$  must be continuous or have a step discontinuity at  $t = 0$  (that is, no impulses or their derivatives at  $t = 0$ ).

13